ASSEMBLY INSTRUCTION

1ARSL or Q

WIDESPREAD LAVATORY SET



1ARSL



1ARSQ


REMOVAL OF FAUCET:


Always turn the water supply off before removing the existing faucet or disassembling a valve. Open both faucet handles to relieve water pressure and to ensure that the water has been successfully turned off.


CARE OF FAUCET:


The use of warm water and a soft cloth is all that is required to clean Rubinet products. The patina of our living finishes (Oil Rubbed Bronze & Tuscan Brass) will change as a result of normal use. Applying Mineral Oil on occasion will create a softer look, subtle color changes and character.



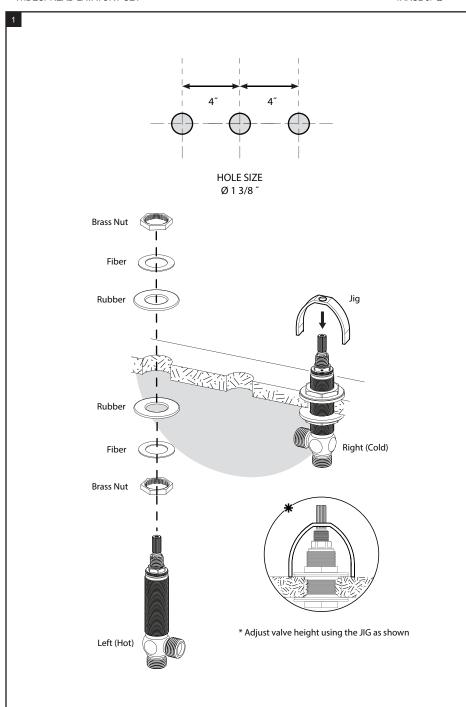

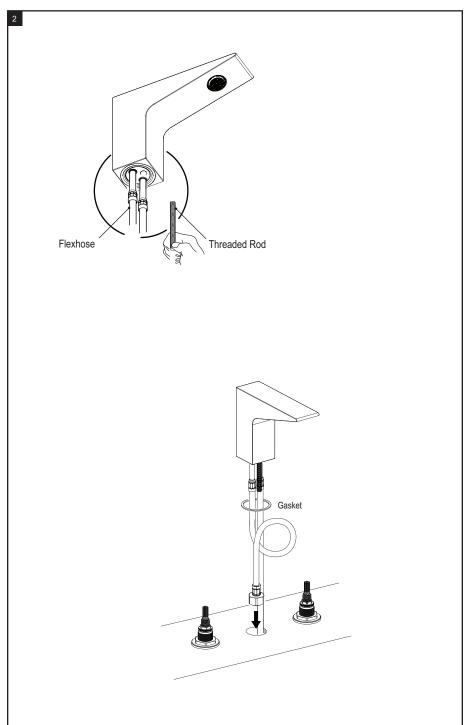


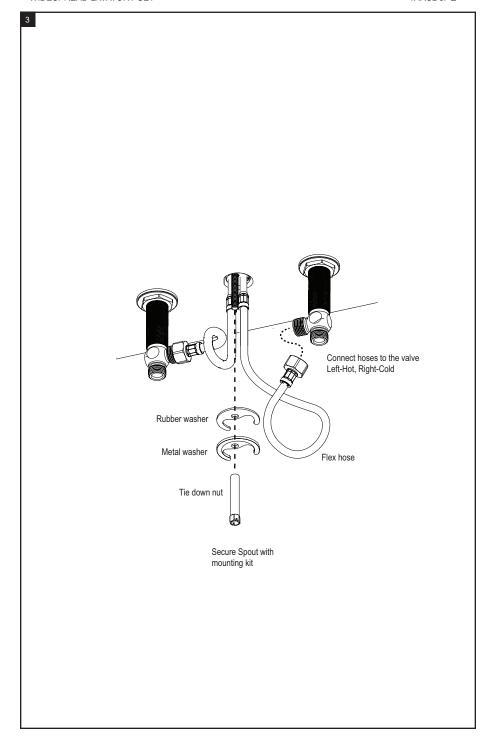


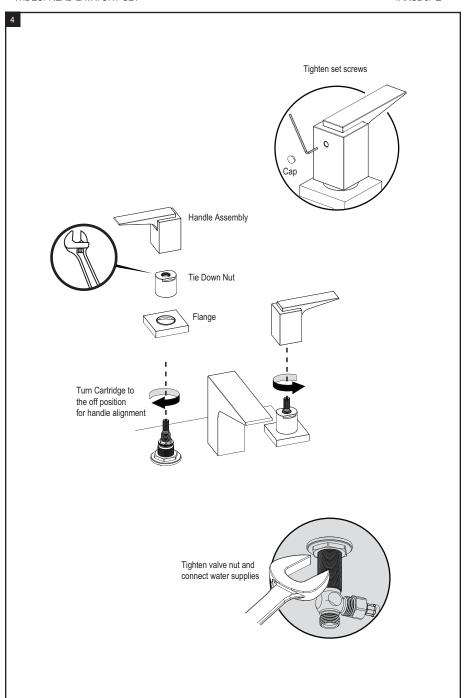


5

AERATOR REMOVAL








FEATURES:

- Brass construction with choice of 21 finishes
- Two lever or square handles
- Quater turn Ceramic Disk cartridges
- -- 1.2 gpm @ 60 psi (Helps meet CalGreen regulation)

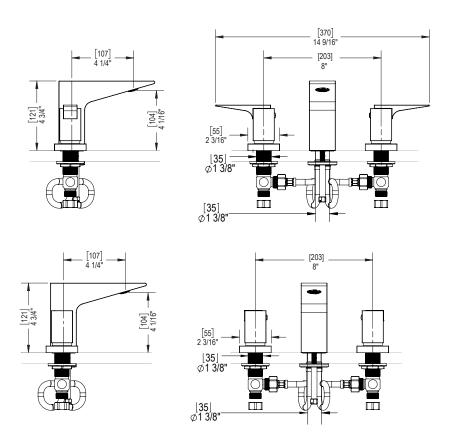

CONTACT US:

If you need assistance with installation, replacement parts or have any questions regarding your Rubinet product, please call a Customer Service representative at: 905-851-6781 toll free 1-800-461-5901 or visit **www.rubinet.com**