

ASSEMBLY INSTRUCTION**8AHOL or R**

WIDESPREAD KITCHEN SET

**8AHOL****8AHOR****REMOVAL OF FAUCET:**


Always turn the water supply off before removing the existing faucet or disassembling a valve. Open both faucet handles to relieve water pressure and to ensure that the water has been successfully turned off.


CARE OF FAUCET:

The use of warm water and a soft cloth is all that is required to clean Rubinet products. The patina of our living finishes (Oil Rubbed Bronze & Tuscan Brass) will change as a result of normal use. Applying Mineral Oil on occasion will create a softer look, subtle color changes and character.


CONTACT US:


If you need assistance with installation, replacement parts or have any questions regarding your Rubinet product, please call a Customer Service representative at: 905-851-6781 toll free 1-800-461-5901 or visit www.rubinet.com

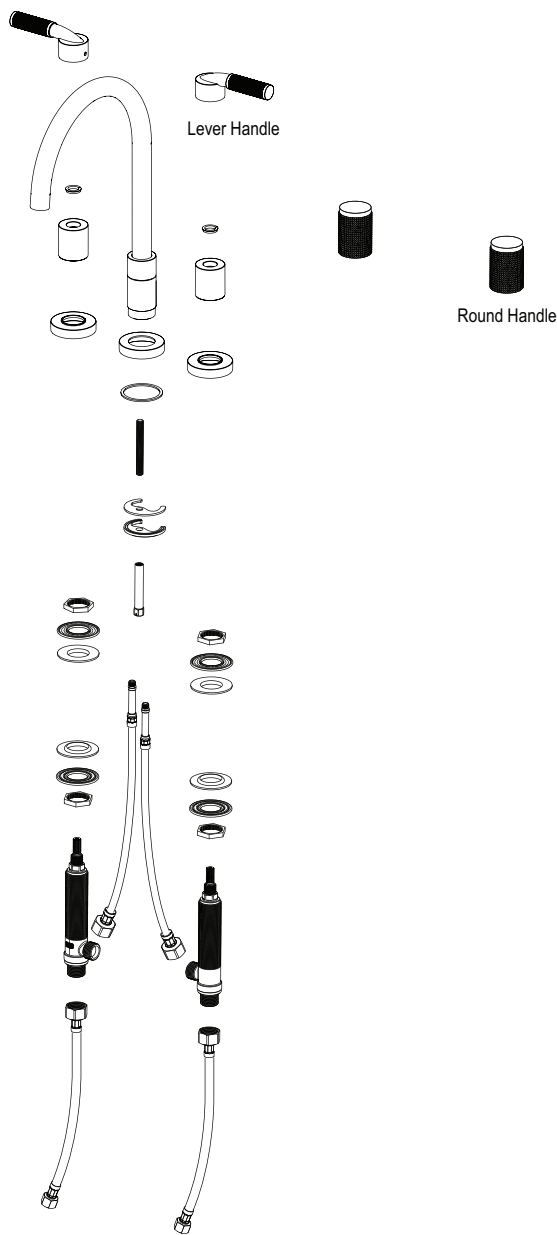


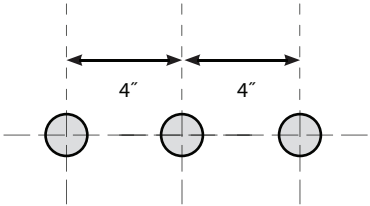


HOLE SIZE
Ø 1 3/8 "

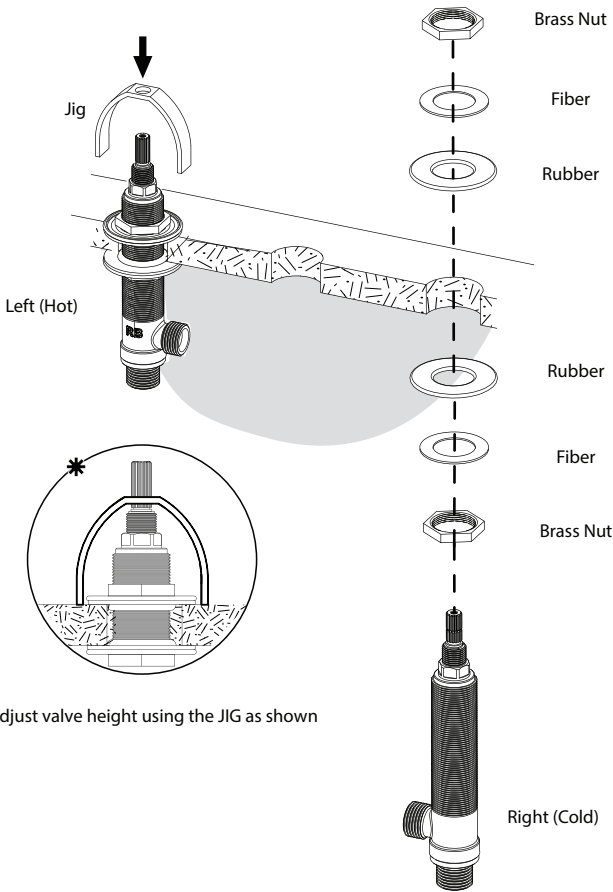


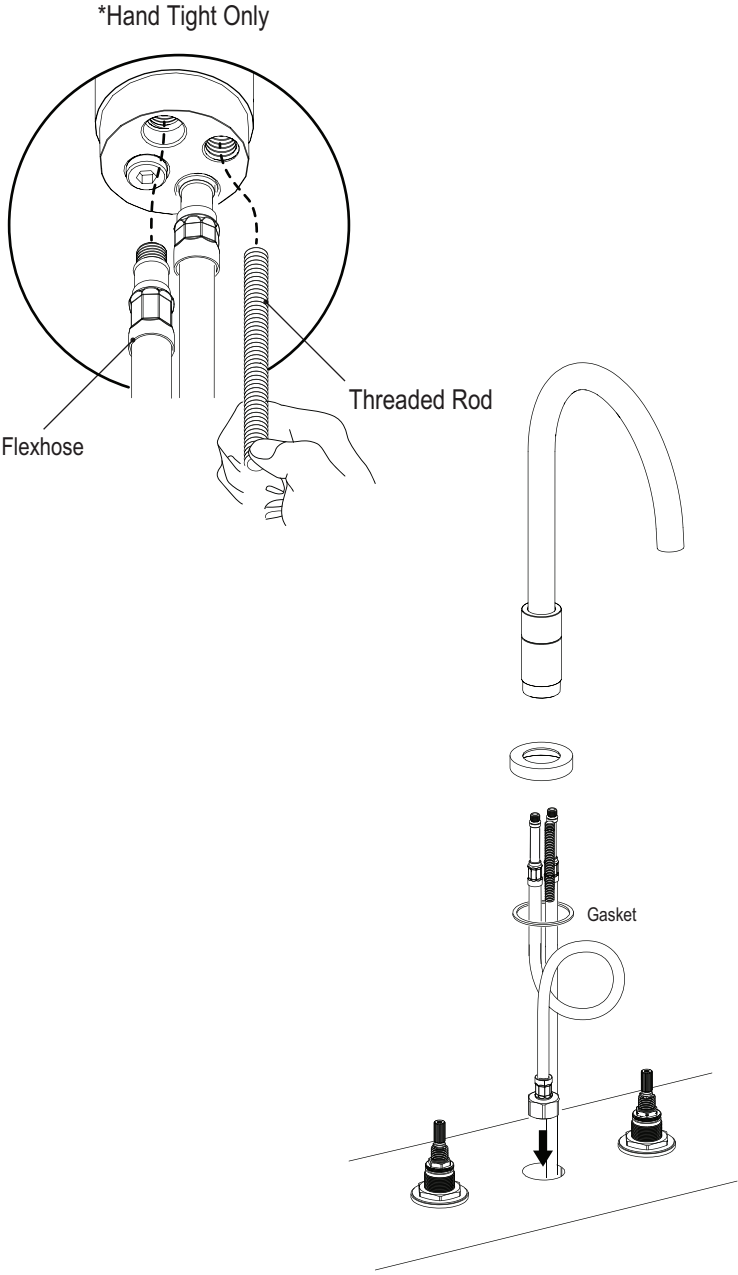

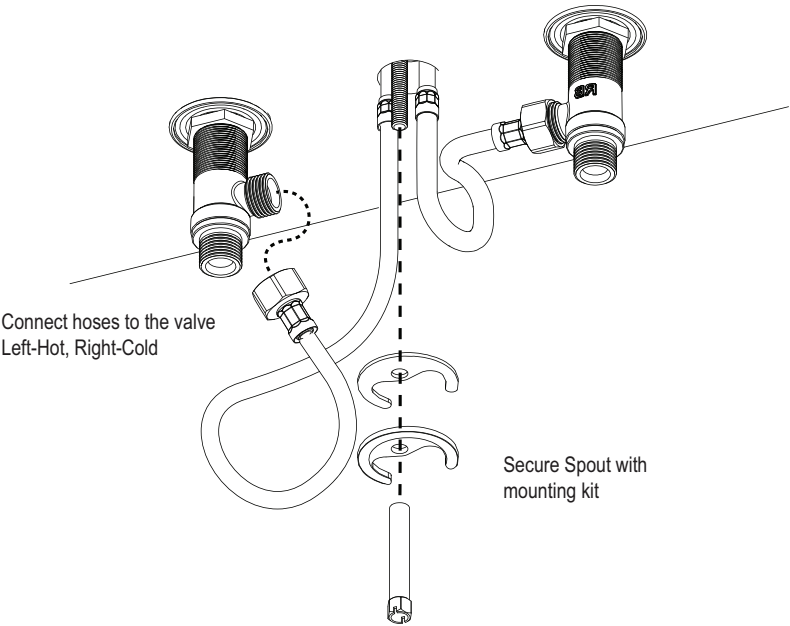




Secure handle
after alignment

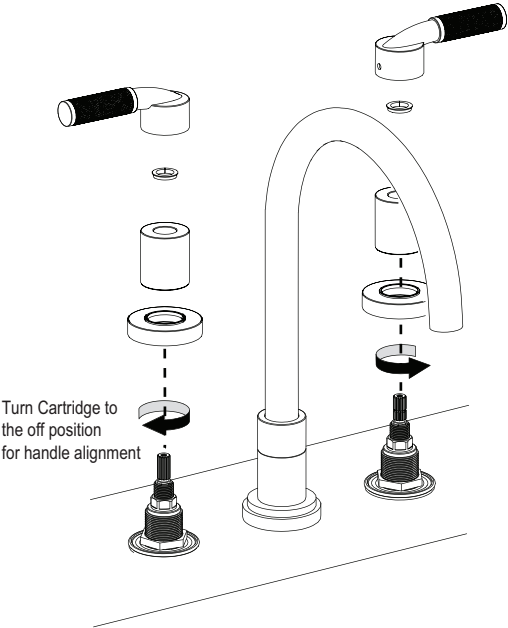

Turn Cartridge to
the off position
for handle alignment

Tighten valve nut and
connect water supplies

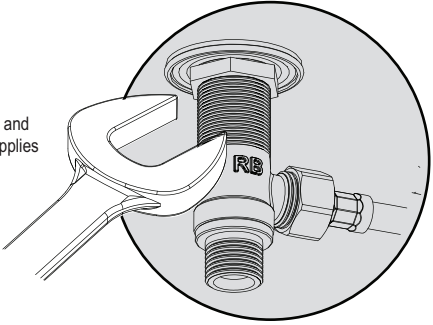

ROUND HANDLE INSTALLATION

