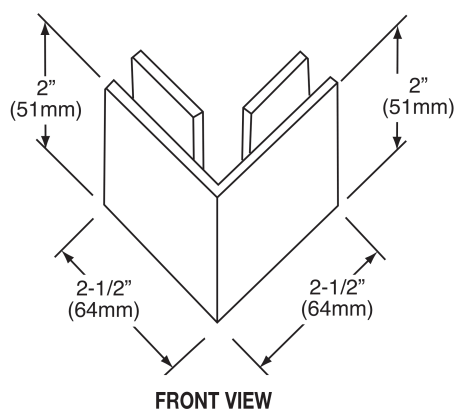
**Specifications:**

Material:	Solid brass
Glass Thickness Range:	3/8" (10mm) to 1/2" (12mm)
Hole Size Required:	3/4" (19mm)
Includes:	Mounting screws and gaskets

***NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.


TEL: 905-851-6781
FAX: 905-851-8031
TOLL FREE: 800-461-5901

THE **Rubinet** FAUCET COMPANY


www.rubinet.com

IMPORTANT: Project measurements from the edge of the glass.

TYPICAL INSTALLATION

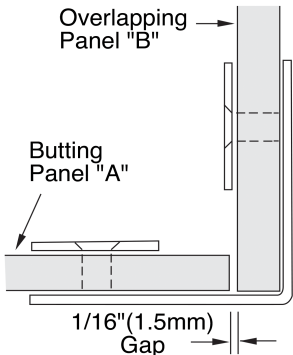


TEMPLATE OPTION FOR 22-1/2° MITERED GLASS

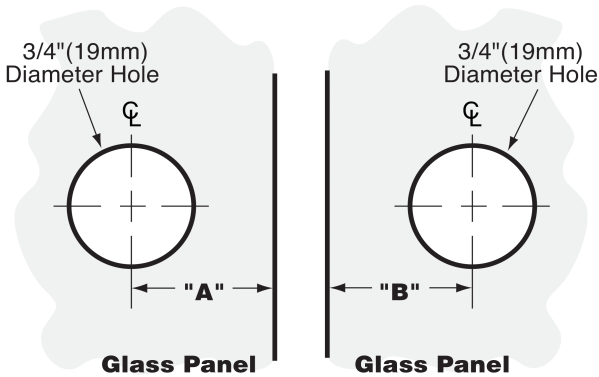


Glass Thickness	"A"* Measurement	"B"* Measurement
3/8"(10mm)	1-3/16"(30mm)	1-5/8"(41mm)
1/2"(12mm)	1-1/16"(27mm)	1-5/8"(41mm)

TYPICAL INSTALLATION



Glass Thickness	"C"* Measurement
3/8"(10mm)	1-9/16"(40mm)
1/2"(12mm)	1-9/16"(40mm)

TEMPLATE OPTION FOR 45° MITERED GLASS

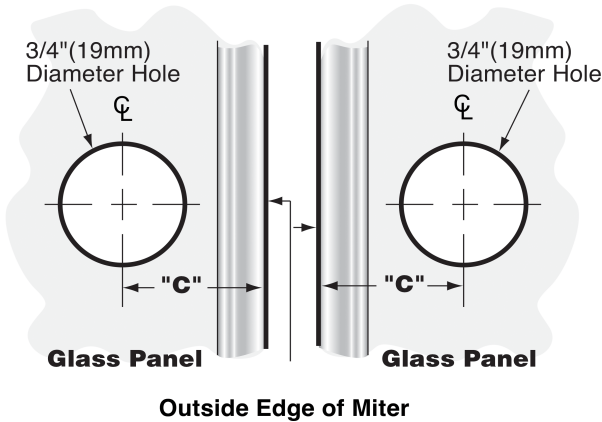

The Template Options on This Page Apply to the Following Clamps:
90° Glass Clamp (Glass-to-Glass Application) | 90° Glass Clamp