


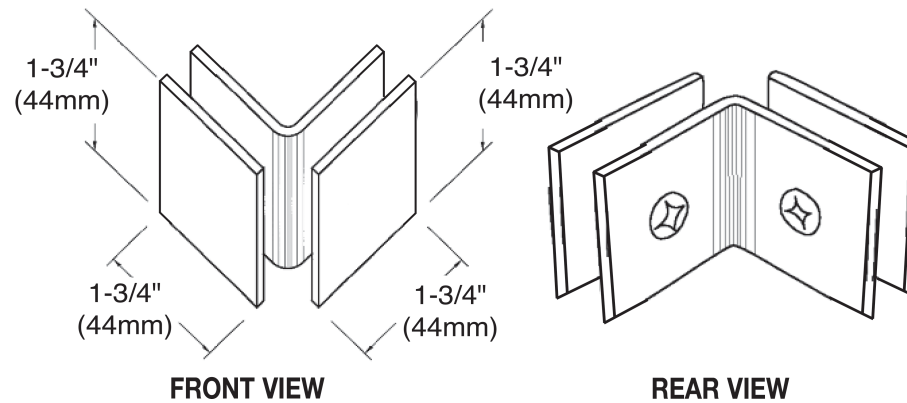

Material: Solid brass

Glass Thickness : 3/8" (10mm) or 1/2" (12mm)

Hole Size Required: 5/8" (16mm) or 3/4" (19mm)

Includes: Mounting screws and gaskets

***NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.


TEL: 905-851-6781
FAX: 905-851-8031
TOLL FREE: 800-461-5901

THE **Rubinet** FAUCET COMPANY


www.rubinet.com

IMPORTANT: Project measurements from the edge of the glass.

TYPICAL INSTALLATION




Template Option for Square Cut Glass

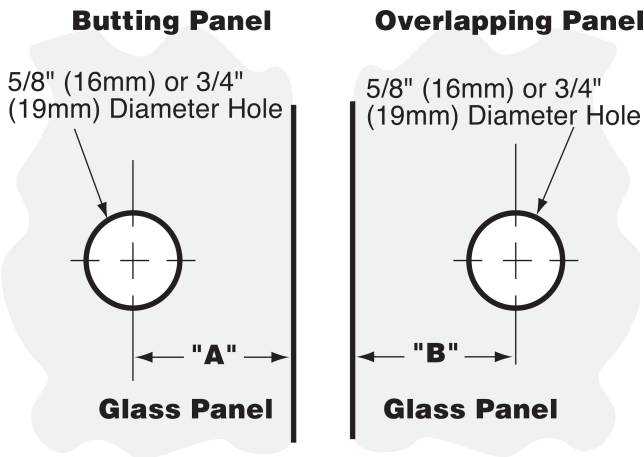


Glass Thickness	"A" Measurement	"B" Measurement
1/4" (6mm)	15/16" (24mm)	1-1/4" (32mm)
5/16" (8mm)	15/16" (24mm)	1-5/16" (34mm)
3/8" (10mm)	15/16" (24mm)	1-3/8" (35mm)
1/2" (12mm)	15/16" (24mm)	1-1/2" (38mm)

TYPICAL INSTALLATION

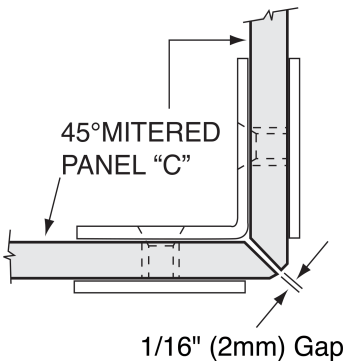

Template Option for 45° Mitered Glass

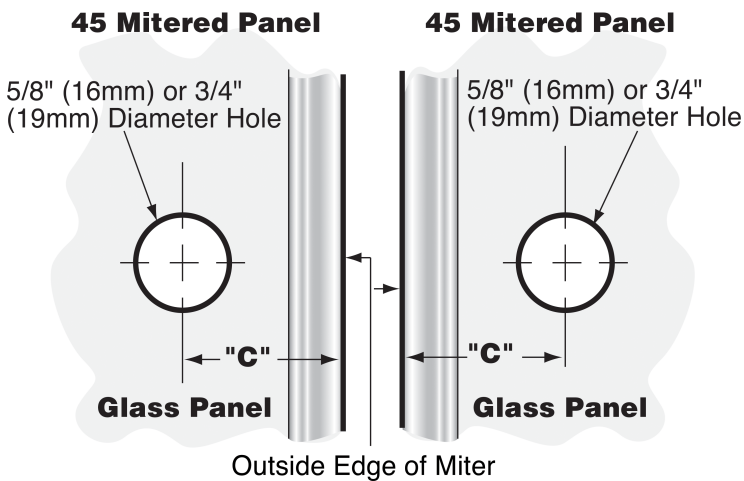

Glass Thickness	"C"* Measurement
1/4" (6mm)	1-3/16" (30mm)
5/16" (8mm)	1-1/4" (32mm)
3/8" (10mm)	1-5/16" (34mm)
1/2" (12mm)	1-7/16" (37mm)

*From outside edge of miter